



Reflectiv[®]
Window Films

CATALOGUE 2024

DECORATIVE FILMS



OUR RANGE OF

DECORATIVE FILMS

Degressive white / frosted / metallic

p. 4-20

Ligns

p. 21-35

Blackout patterns

p. 36-85

Geometric patterns

p. 86-88

INT 129



SEE TECHNICAL
DATA SHEET

INT 139

SEE TECHNICAL
DATA SHEET

INT 121

SEE TECHNICAL
DATA SHEET



INT 120



SEE TECHNICAL
DATA SHEET

INT 122

SEE TECHNICAL
DATA SHEET

INT 128



SEE TECHNICAL
DATA SHEET

INT 110

SEE TECHNICAL
DATA SHEET



INT 115

SEE TECHNICAL
DATA SHEET

INT 123



SEE TECHNICAL
DATA SHEET



SEE TECHNICAL
DATA SHEET

INT 126

SEE TECHNICAL
DATA SHEET





SEE TECHNICAL
DATA SHEET

INT 130

SEE TECHNICAL
DATA SHEET



INT 132

SEE TECHNICAL
DATA SHEET

INT 140

SEE TECHNICAL
DATA SHEET



INT 142



SEE TECHNICAL
DATA SHEET

INT 138

SEE TECHNICAL
DATA SHEET



INT 234



SEE TECHNICAL
DATA SHEET

INT 236



SEE TECHNICAL
DATA SHEET



INT 237

SEE TECHNICAL
DATA SHEET

INT 560



SEE TECHNICAL
DATA SHEET



INT 212



SEE TECHNICAL
DATA SHEET

INT 213



SEE TECHNICAL
DATA SHEET

INT 220



SEE TECHNICAL
DATA SHEET

INT 230

SEE TECHNICAL
DATA SHEET



INT 244



SEE TECHNICAL
DATA SHEET

INT 245



SEE TECHNICAL
DATA SHEET

INT 250

SEE TECHNICAL
DATA SHEET

INT 420

SEE TECHNICAL
DATA SHEET



INT 435

SEE TECHNICAL
DATA SHEET

INT 570



SEE TECHNICAL
DATA SHEET





INT 610

SEE TECHNICAL
DATA SHEET

INT 880



SEE TECHNICAL
DATA SHEET

INT 860

SEE TECHNICAL
DATA SHEET

INT 276

SEE TECHNICAL
DATA SHEET





SEE TECHNICAL
DATA SHEET

INT 288



SEE TECHNICAL
DATA SHEET

INT 300




SEE TECHNICAL
DATA SHEET

INT 333

SEE TECHNICAL
DATA SHEET



INT 363

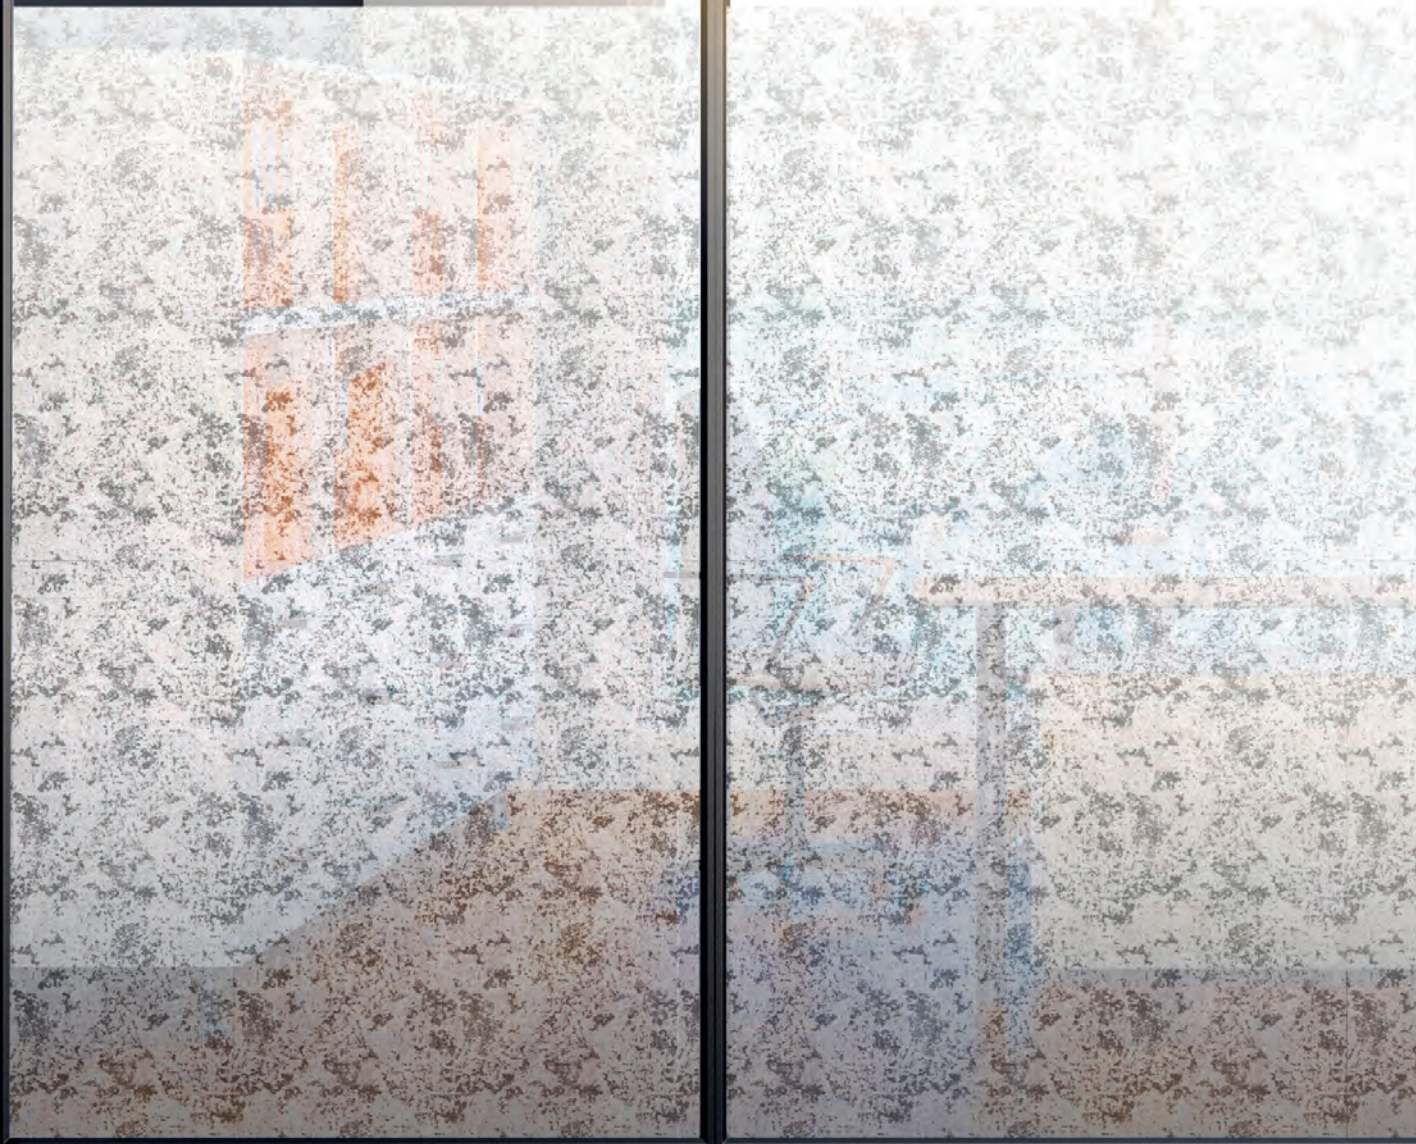


SEE TECHNICAL
DATA SHEET

INT 290

SEE TECHNICAL
DATA SHEET



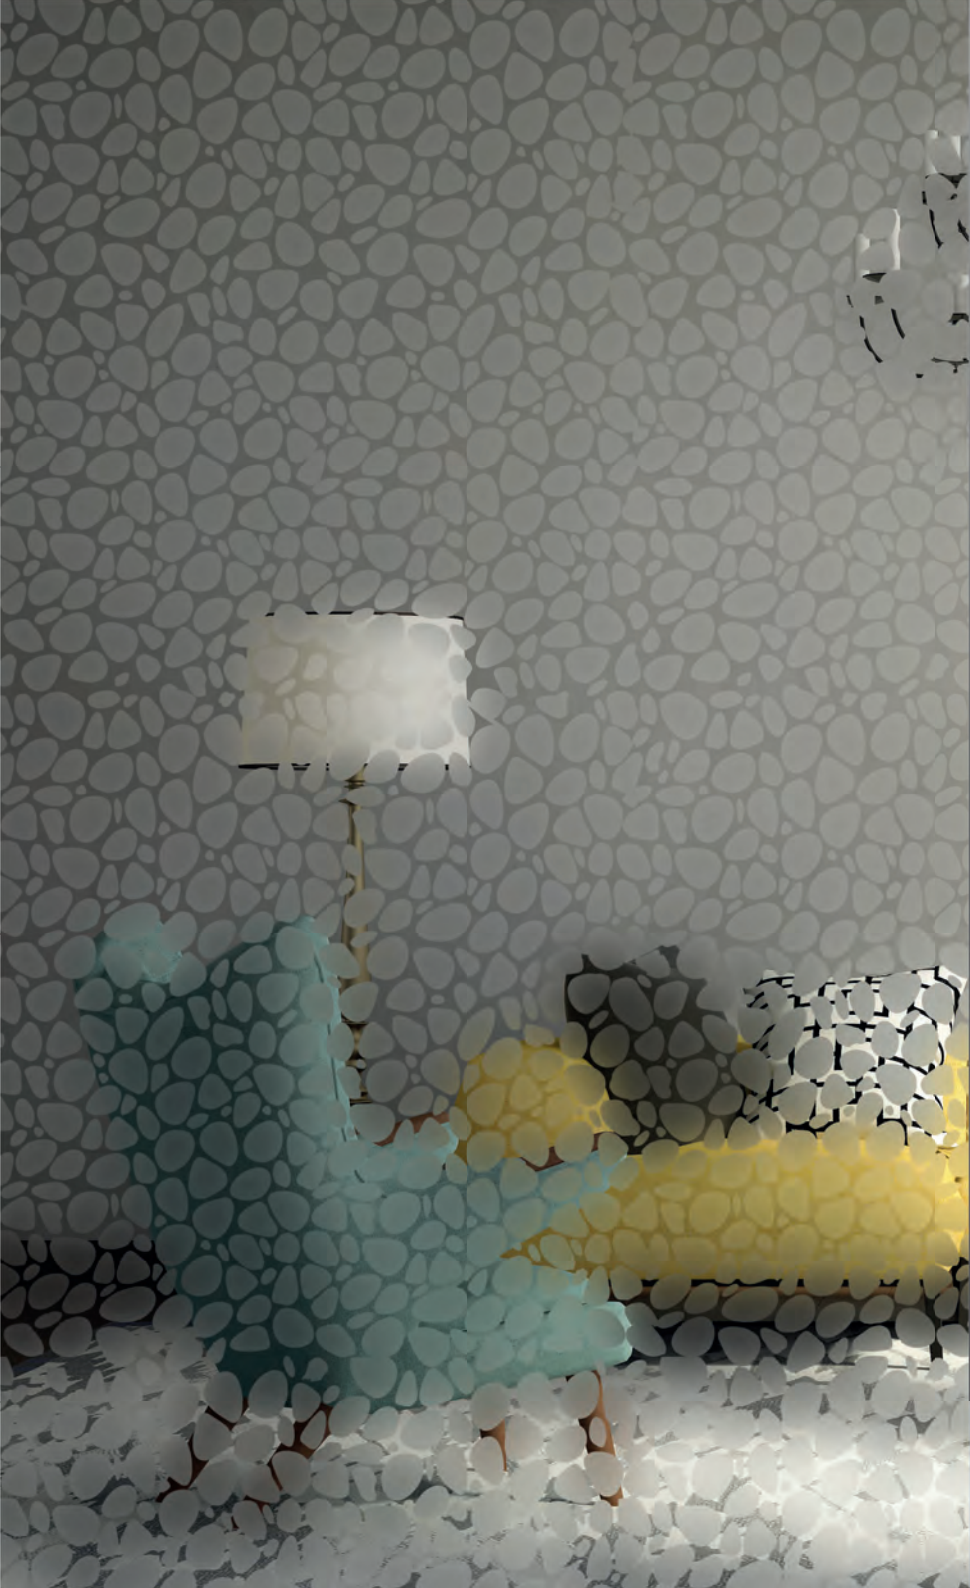

INT 320

SEE TECHNICAL
DATA SHEET

INT 450



SEE TECHNICAL
DATA SHEET

INT 460



SEE TECHNICAL
DATA SHEET

INT 520



SEE TECHNICAL
DATA SHEET

INT 470



SEE TECHNICAL
DATA SHEET

INT 480

SEE TECHNICAL
DATA SHEET



INT 490



SEE TECHNICAL
DATA SHEET

INT 491



SEE TECHNICAL
DATA SHEET



INT 496



SEE TECHNICAL
DATA SHEET

INT 468



SEE TECHNICAL
DATA SHEET

INT 538



SEE TECHNICAL
DATA SHEET

INT 540



SEE TECHNICAL
DATA SHEET

INT 549



SEE TECHNICAL
DATA SHEET

INT 780



SEE TECHNICAL
DATA SHEET




INT 792

SEE TECHNICAL
DATA SHEET

INT 861



SEE TECHNICAL
DATA SHEET

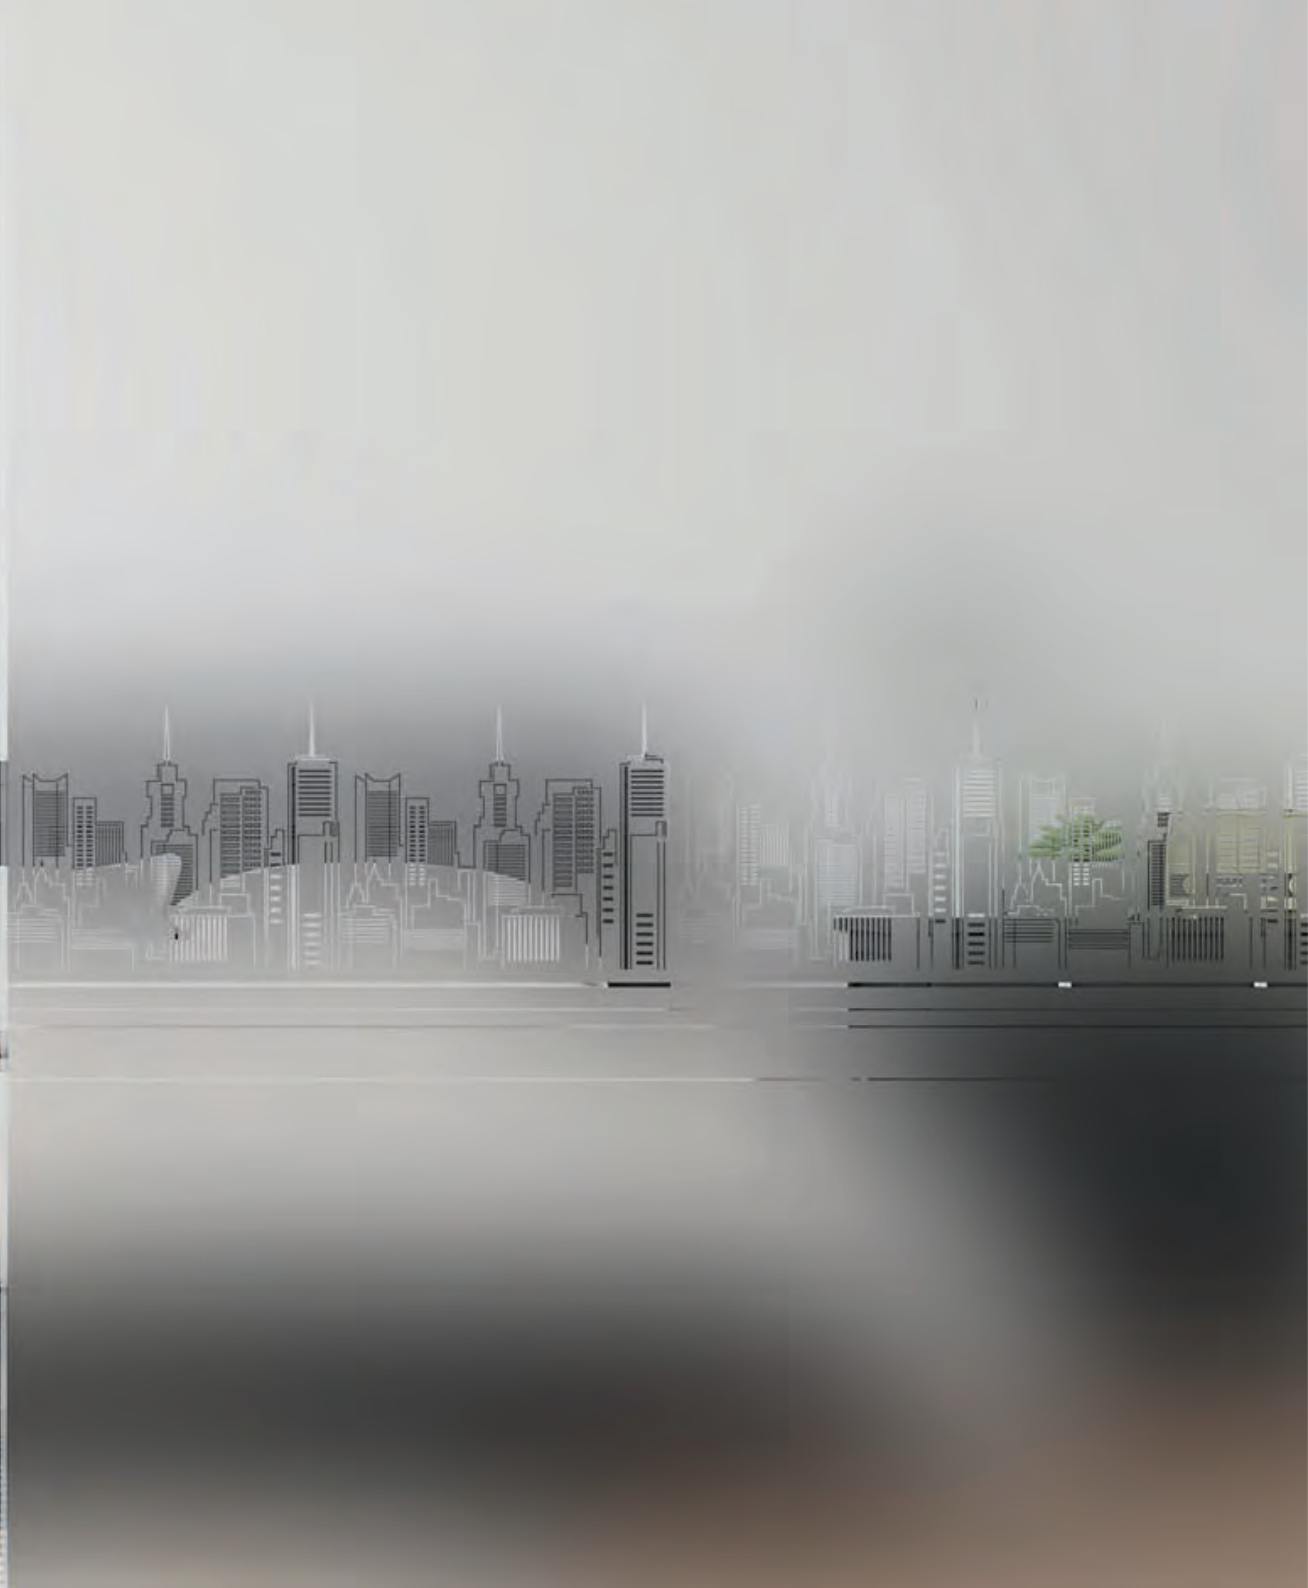



INT 864




SEE TECHNICAL
DATA SHEET

INT 940



SEE TECHNICAL
DATA SHEET

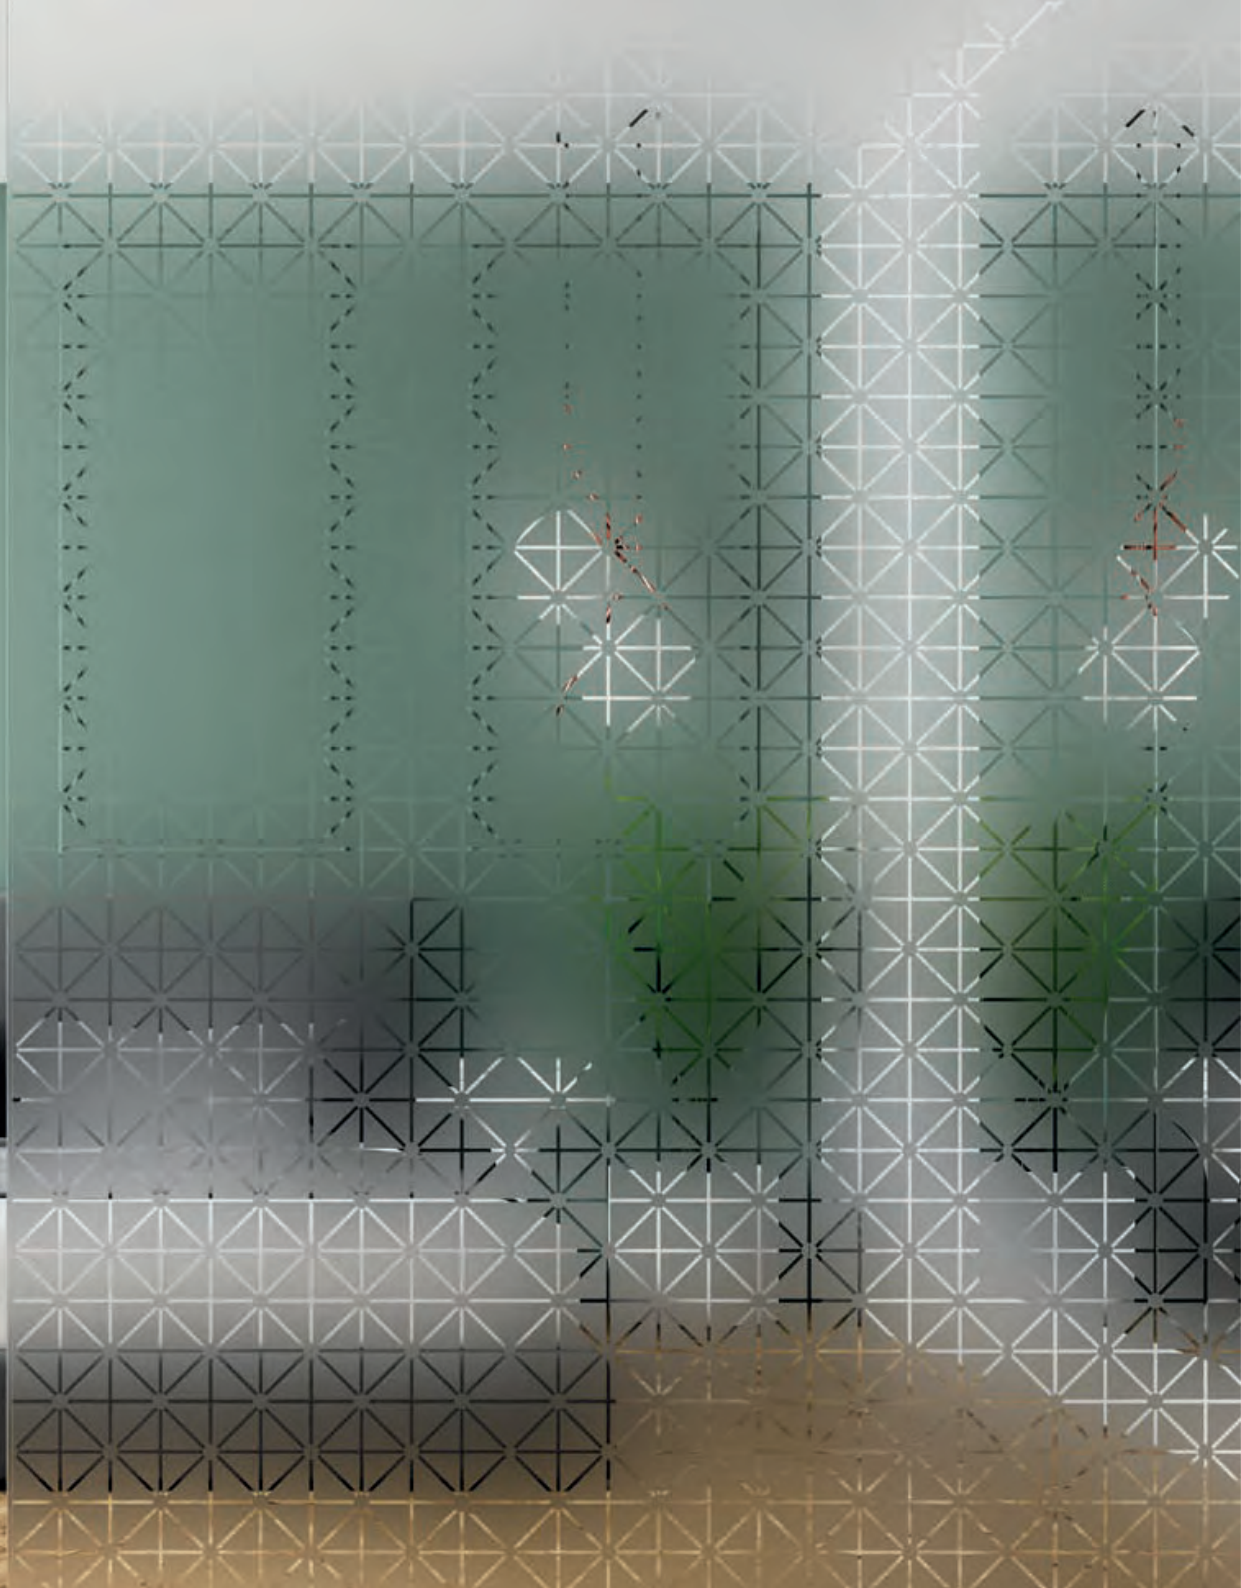

INT 150



SEE TECHNICAL
DATA SHEET

INT 343

SEE TECHNICAL
DATA SHEET



INT 353



SEE TECHNICAL
DATA SHEET

INT 478

SEE TECHNICAL
DATA SHEET





SEE TECHNICAL
DATA SHEET

INT 500




SEE TECHNICAL
DATA SHEET

INT 528



SEE TECHNICAL
DATA SHEET

INT 510

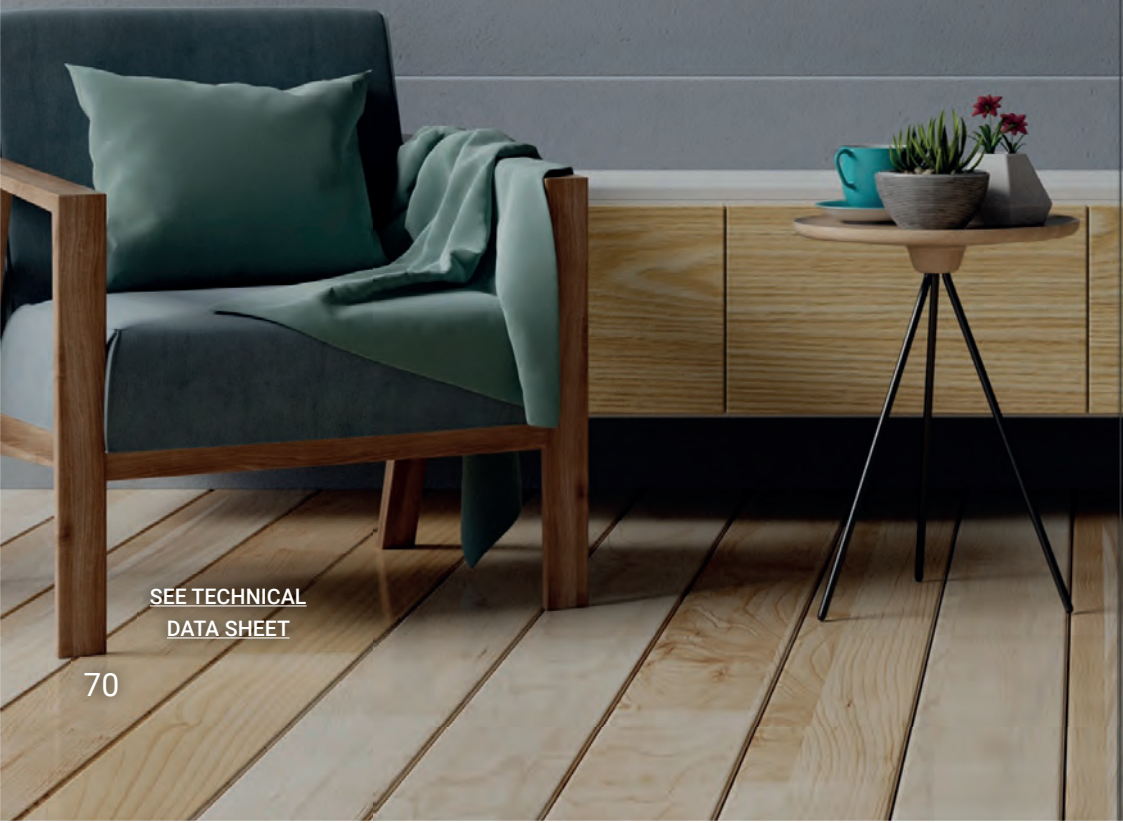

SEE TECHNICAL
DATA SHEET



INT 528



SEE TECHNICAL
DATA SHEET

INT 529



SEE TECHNICAL
DATA SHEET



SEE TECHNICAL
DATA SHEET

INT 710



SEE TECHNICAL
DATA SHEET

INT 730



SEE TECHNICAL
DATA SHEET

INT 710



SEE TECHNICAL
DATA SHEET





SEE TECHNICAL
DATA SHEET

INT 793



SEE TECHNICAL
DATA SHEET

INT 539



SEE TECHNICAL
DATA SHEET

INT 530



SEE TECHNICAL
DATA SHEET



SEE TECHNICAL
DATA SHEET

INT 535

SEE TECHNICAL
DATA SHEET



INT 537



SEE TECHNICAL
DATA SHEET

INT 534



SEE TECHNICAL
DATA SHEET

INT 536



SEE TECHNICAL
DATA SHEET

INT 770

SEE TECHNICAL
DATA SHEET



INT 380




SEE TECHNICAL
DATA SHEET

INT 782

SEE TECHNICAL
DATA SHEET



STR 01

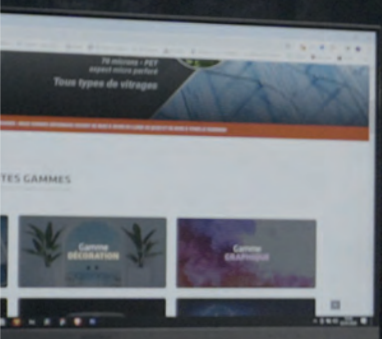

SEE TECHNICAL
DATA SHEET

STR 02

SEE TECHNICAL
DATA SHEET

STR 04

SEE TECHNICAL
DATA SHEET

STR 05




SEE TECHNICAL
DATA SHEET

STR 06

SEE TECHNICAL
DATA SHEET

STR 07

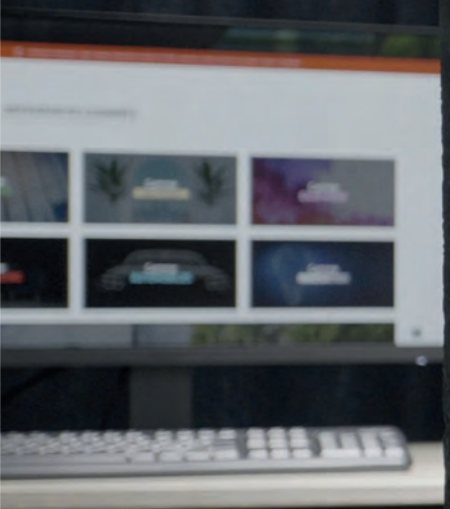

SEE TECHNICAL
DATA SHEET

STR 08

SEE TECHNICAL
DATA SHEET

Application
instructions :



Installation
video :



TECHNICAL INFORMATION

Support :	PET
Adhesive :	Acrylic polymer 13gr/m ²
Protector :	Siliconised PET 23 microns
Thickness :	23 microns
Application side :	Interior
T° of application :	min, + 5°C
Standards :	EUROCLASSES
Fire rating :	B-s1, d0
Garanty :	10 years indoors if not exposed to sunlight

PRODUCTION MONITORING AND STANDARDS


In order to constantly improve our products, we may modify colours and manufacturing processes without prior notice. Before applying our films, we recommend that users ensure that they are suitable for the intended use and comply with current standards.


APPLICATION ADVICE


To install, use soapy water and suitable tools.


RECOMMENDATIONS

The surface must be clean and covered with soapy water before application. For best results, use the appropriate equipment. Some materials, such as polycarbonate, can generate bubbles. To meet the highest standards, we recommend that you do not mix films from different productions.

 **DURABILITY :** 10 years for vertical applications in Central Europe.

 **USE :** For all types of glass

 **MAINTENANCE :** After 30 days with a standard cleaning solution (non-abrasive, ammonia-free, etc.). Do not use cleaning products that could scratch the surface.

 **STORAGE :** 2 years from delivery. This film should be stored away from excessive moisture and sunlight, at a temperature below 38°C.

Available in roll sizes : 1,52m | 10 m
30 m



Showroom : 36 rue Réaumur, 75003 Paris.
Head office : P.A. des petits carreaux - 2 avenue des Orangers
94380 Bonneuil sur Marne - FRANCE +33 (0)143 99 00 22 -
info@reflectiv.com - www.reflectiv.com